

HIGH POWER TERMINATION

50W

When properly mounted on an appropriate heat sink, this chip device provides high power dissipation capabilities. Ideal for ferrite isolator applications, the improved thin film design technology and laser trimming provide proven RF power capabilities to meet the demands of today's CAMA and WCDMA system requirements.


- Environmentally friendly ALN substrate
- Hi-performance thin film element
- Power Handling of 50 Watts
- New adhesion process results in improved terminal strength
- On-chip matching network improves frequency performance over the DC-3 GHz frequency range
- Rohs compliant

SPECIFICATIONS

Parameters	Specifications
Frequency Range	DC to 3 GHz
Power	50 Watts*
VSWR	1.25:1 max
Resistance	50 ohms +/- 2 %
Operating Temperature	-55 C to 150 C
Substrate	Aluminum Nitride


* Refer to average power derating curve chart.

AVERAGE POWER DERATING CURVE

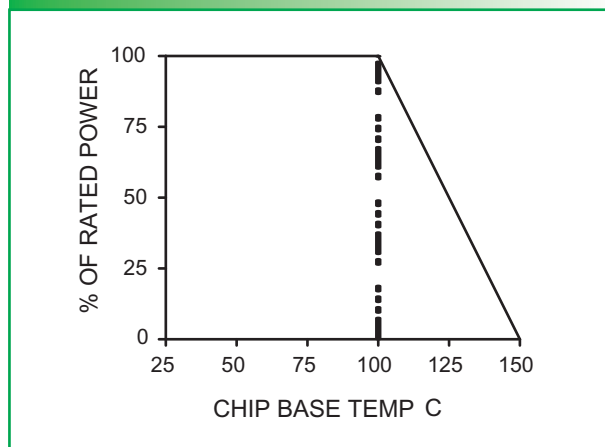

CHIP DIMENSIONS


P/N: MANC250250T050G

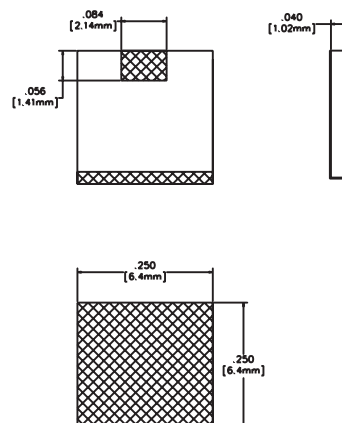

FLANGED DIMENSIONS

P/N: MANF250250T050G

Unit: mm

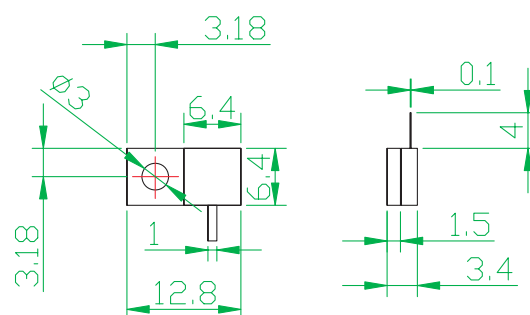

The tab direction maybe left or right by custom required.



CENTRON ELECTRONIC(SHENZHEN) CO.,LTD.

Add: 1602#, North tower, Gangsong Bldg. chengongmiao. Futian, Shenzhen

Tel: 0755-83846776

Fax: 0755-83846775

Http://www.rf-power.com.cn

E-mail: milcom@milcom.com.cn

2006 MAR